

Single Phase Inverter


Omniksol-2k/2.5k/3k-TL3-S



product features

【Features】	【Advantages】	【Benefits】
·5-25 years warranty as optional	·Guaranteed product quality	·Guaranteed customer benefits
·Built-in GPRS module as optional	·Plug and play	·Remote monitoring without setting
·Built-in WiFi module as optional	·Free monitoring fee for data transmission	·Remote monitoring without any charge
·Circuit design based on temperature gradient	·Lower internal temperature	·Longer life cycle
·Smaller and lighter, only 8 kg	·Easy transportation and installation	·Saving storage and installation space
·Meet VDE AR-N-4105 certification	·Adjustable active and reactive power	·Meet the latest regulations
·High performance DSP for algorithm control	·Faster CPU speed	·Higher inverter control accuracy
·New topology design	·Max. efficiency 97.2%, Euro efficiency 96.6%	·Increase system payback ability
·Multi-button touch interface	·User friendly operation	·Easy to operate
·Power supply from AC side	·Query the state of inverter at night	·Real-time data readable for 24 hours
·Anti-shadow function	·Suitable to complex installation environment	·Increase the electricity generation of the system in shading environment

Block Diagram

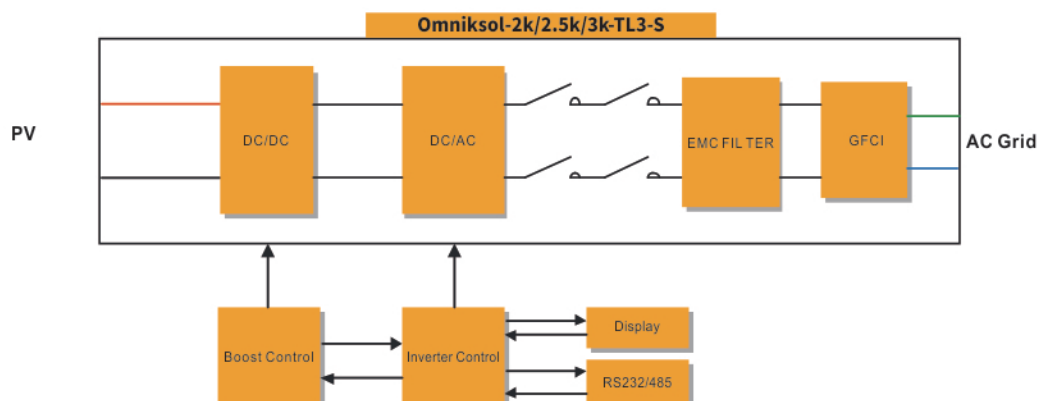

Technical Data

Omniksol-2k/2.5k/3k-TL3-S

Type	Omniksol-2k-TL3-S	Omniksol-2.5k-TL3-S	Omniksol-3k-TL3-S
Input(DC)			
Max. PV Module Power [W]	2400	3000	3600
Max. DC Voltage [V]	500	500	500
Nominal DC Voltage [V]	360	360	360
Operating MPPT Voltage Range [V]	120 - 450	120 - 450	120 - 450
MPPT Voltage Range at Nominal Power [V]	210 - 450	260 - 450	320 - 450
Start up DC Voltage [V]	150	150	150
Turn off DC Voltage [V]	120	120	120
Max. DC Current[A]	10	10	10
Max. Short Circuit Current [A]	14	14	14
Number of MPP trackers	1	1	1
Number of DC Connection	1	1	1
DC Connection Type	MC4 Connector	MC4 Connector	MC4 Connector
Output(AC)			
Max. AC Apparent Power [VA]	2200	2750	3300
Nominal AC Power [W]	2000	2500	3000
Nominal Grid Voltage [V]	220 / 230 / 240	220 / 230 / 240	220 / 230 / 240
Nominal Grid Frequency [Hz]	50 / 60	50 / 60	50 / 60
Max. AC Current [A]	10	12.5	15
Grid Voltage Range [V]*	185 - 276	185 - 276	185 - 276
Grid Frequency Range [Hz]*	45 - 55 / 55 - 65	45 - 55 / 55 - 65	45 - 55 / 55 - 65
Power Factor	0.9i - 0.9c	0.9i - 0.9c	0.9i - 0.9c
Total Harmonic Distortion (THD)	<3%	<3%	<3%
Night time Power Consumption [W]	<1	<1	<1
AC Connection Type	Plug-in connector	Plug-in connector	Plug-in connector
Efficiency			
Max. Efficiency	97.2%	97.2%	97.2%
Euro Efficiency	96.6%	96.6%	96.6%
MPPT Efficiency	99.9%	99.9%	99.9%
Safety and Protection			
DC Insulation Monitoring		Yes	
DC Switch		Optional	
Residual Current Monitoring Unit (RCMU)		Integrated	
Grid Monitoring with Anti-islanding		Yes	
Protection Class		I (According to IEC 62103)	
Overvoltage Category		PV II / Mains III (According to IEC 62109-1)	
Reference Standard			
Safety Standard		EN 62109 ,AS/NZS 3100	
EMC Standard	EN 61000-6-1,EN61000-6-3,EN 61000-6-2,EN61000-6-4,EN61000-3-2,EN 61000-3-3		
Grid Standard	VDE-AR-N 4105,VDE 0126-1-1,C10/11,G83/2,UTE C 15-721-1,AS4777,CEI 0-21, EN50438,NB/T32004		
Physical Structure			
Dimensions (WxHxD) [mm]		245 * 346 * 123	
Weight [kg]		8	
Environmental Protection Rating		IP 65 (According to IEC 60529)	
Cooling Concept		Natural convection	
Mounting Information		Wall bracket	
General Data			
Operating Temperature Range [°C]		-25 to +60 (derating above 45°C)	
Relative Humidity		0% to 100%,no condensation	
Max. Altitude (above sea level) [m]		2000	
Noise Level [dB]		<40	
Isolation Type		Transformerless	
Display		2 LED,Backlight,2 * 16 Character LCD	
Data Communication Interfaces		RS485 / WiFi / GPRS optional	
Guarantee		5 - 25 years optional	

*The AC voltage and frequency range may vary depending on specific country grid